


TEST REPORT



Applicant	Flashbay Electronics
Address	1-4/F of Bldg No.3, Bldg No.2, 101-501F of Bldg No.1, Xifengcheng Industrial Park, No.2, Fuyuan Road, Heping Community, Fuhai Street, Baoan District, Shenzhen City, Guangdong Province, P.R. China

Manufacturer or Supplier	Flashbay Electronics	
Address	1-4/F of Bldg No.3, Bldg No.2, 101-501F of Bldg No.1, Xifengcheng Industrial Park, No.2, Fuyuan Road, Heping Community, Fuhai Street, Baoan District, Shenzhen City, Guangdong Province, P.R. China	
Product	Wireless chargers	
Brand Name	N/A	
Model	Cirque	
Additional Model & Model Difference	Edge, see items 2.1	
Date of tests	Aug. 27, 2019 ~ Sep. 13, 2019	

The submitted sample of the above equipment has been tested for according to the client's specification.

- VCCI-CISPR 32:2016, Class B
- VCCI 32-1:2016, Class B

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Breeze Jiang Project Engineer/ EMC Department	Approved by Madison Luo Assistant Manager / EMC Department
	
Date: Sep. 20, 2019	

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Table of Contents

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 DESCRIPTION OF SUPPORT UNITS	6
3 EMISSION TEST	7
3.1 CONDUCTED EMISSION MEASUREMENT	7
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	7
3.1.2 TEST INSTRUMENTS	7
3.1.3 TEST PROCEDURE	7
3.1.4 DEVIATION FROM TEST STANDARD	8
3.1.5 TEST SETUP	8
3.1.6 EUT OPERATING CONDITIONS	8
3.1.7 TEST RESULTS	9
3.2 RADIATED EMISSION MEASUREMENT	11
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	11
3.2.2 TEST INSTRUMENTS	12
3.2.3 TEST PROCEDURE	13
3.2.4 DEVIATION FROM TEST STANDARD	14
3.2.5 TEST SETUP	15
3.2.6 EUT OPERATING CONDITIONS	15
3.2.7 TEST RESULTS	16
4 PHOTOGRAPHS OF THE EUT	18
5 APPENDIX A-MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	20



**BUREAU
VERITAS**

Test Report No.: V190827N053

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
V190827N053	Original release	Sep. 20, 2019



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications.

EMISSION			
Standard	Test Type	Result	Remarks
VCCI-CISPR 32:2016, Class B	Conducted emission from the AC mains power port	PASS	Minimum passing margin is -17.71 dB at 2.94450 MHz
	Radiated test (30MHz ~ 1GHz)	PASS	Minimum passing margin is -6.96 dB at 43.969 MHz

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Mains Terminal Disturbance Voltage Emission	0.15MHz ~ 30MHz	+/-2.70 dB
Radiated Emission test	30MHz ~ 1GHz	+/- 4.04 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless chargers
MODEL NO.	Cirque
ADDITIONAL MODEL	Edge
POWER SUPPLY	DC 5V from USB Host Unit
CABLE SUPPLIED	USB Line: Unshielded, detachable 1.0m
THE HIGHEST OPERATING FREQUENCY	Below 108MHz

NOTES:

1. For the test results, the EUT had been tested with all conditions. But only the worst case was showed in test report.
2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
3. Please refer to the EUT photo document (Reference No.: 190827N053) for detailed product photo.
4. Additional model Edge is identical with the test model Cirque except the model number for trading purpose.



2.2 DESCRIPTION OF TEST MODES

The EUT were tested under the following modes, the final worst mode was marked in boldface and recorded in this report.

Conducted Emission Test:

Description of Test Mode	Test Voltage
Wireless Charging	DC 5V from Adapter input AC 100V/60Hz

Radiated Emission Test (Below1GHz):

Description of Test Mode	Test Voltage
Wireless Charging	DC 5V from Adapter input AC 100V/60Hz

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Mobile phone	Apple	MQA52CH/A	F2LW4YY9JCLF	N/A
2	Adapter	N/A	DC5V 2A	N/A	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1,2	N/A



3 EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:** (1) The lower limit shall apply at the transition frequencies.
(2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
(3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 13,19	Mar. 12,20
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 17,19	Jan. 16,20
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTES:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed at Shielded Room 553
3. The VCCI Site Registration No. is C-4543.

3.1.3 TEST PROCEDURE


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (AMN). Other support units were connected to the power mains through another AMN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.



3.1.4 DEVIATION FROM TEST STANDARD

No deviation

3.1.5 TEST SETUP

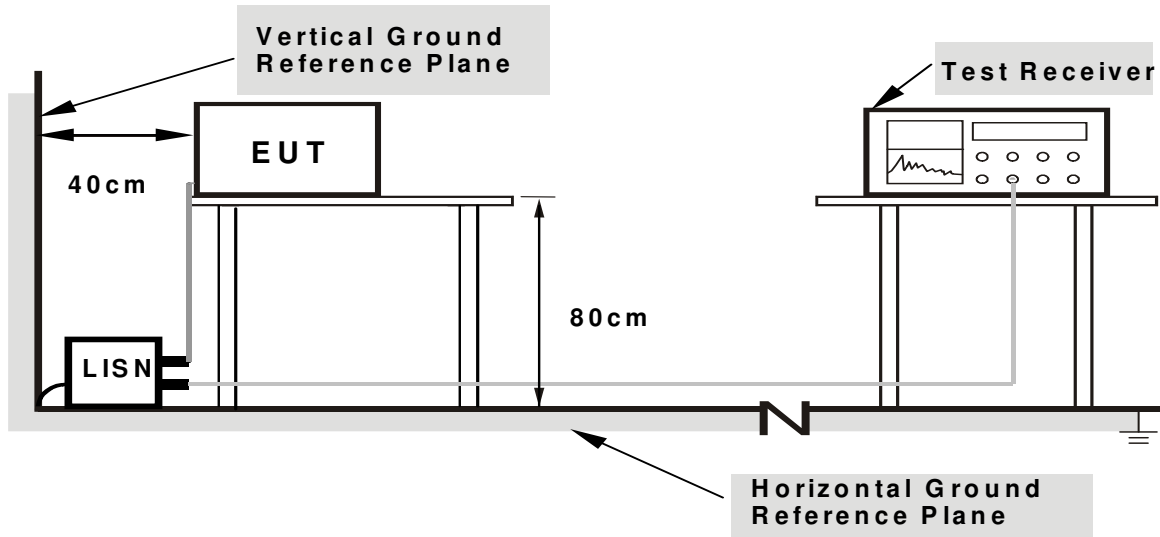

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

3.1.6 EUT OPERATING CONDITIONS


- a. Turned on the power of all equipment.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.



3.1.7 TEST RESULTS

TEST MODE		See section 2.2								
TEST VOLTAGE		See section 2.2				6dB BANDWIDTH		9 kHz		
ENVIRONMENTAL CONDITIONS		25deg. C, 49%RH				TESTED BY: Dragon				
PHASE OF POWER: LINE (L)										
No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.31888	10.21	25.02	12.00	35.23	22.21	59.74	49.74	-24.50	-27.52
2	0.49953	10.22	26.87	16.98	37.09	27.20	56.01	46.01	-18.92	-18.81
3	1.00500	10.24	24.70	14.54	34.94	24.78	56.00	46.00	-21.06	-21.22
4	2.94450	10.22	24.44	18.07	34.66	28.29	56.00	46.00	-21.34	-17.71
5	16.80450	10.32	27.66	16.26	37.98	26.58	60.00	50.00	-22.02	-23.42
6	20.32800	10.33	14.53	8.41	24.86	18.74	60.00	50.00	-35.14	-31.26


REMARKS: The emission levels of other frequencies were very low against the limit.

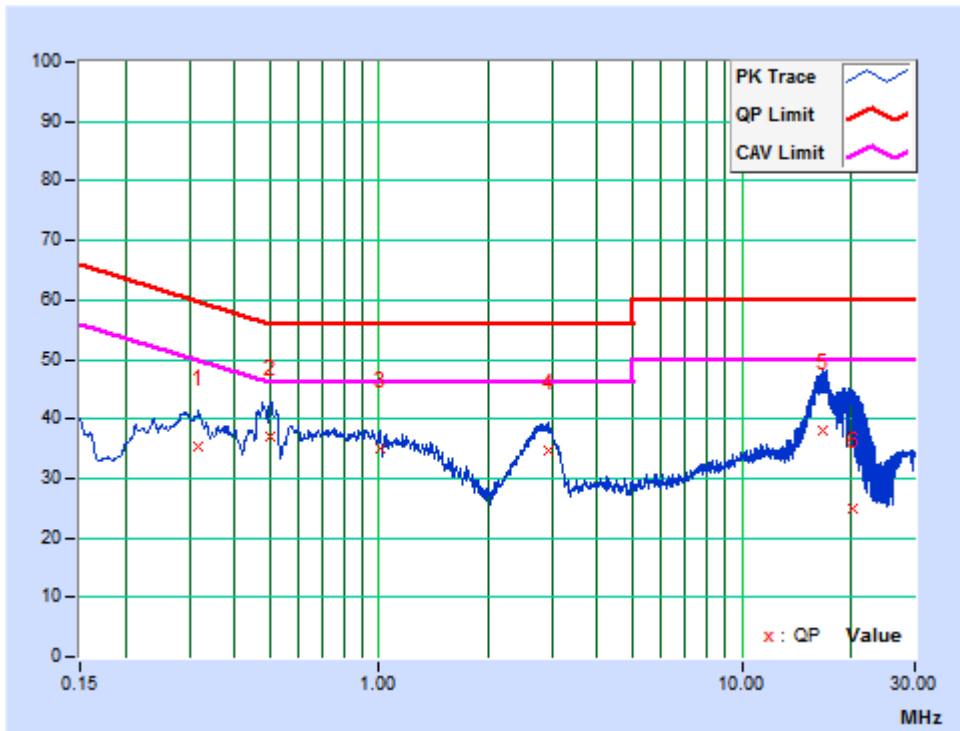



TEST MODE		See section 2.2								
TEST VOLTAGE		See section 2.2				6dB BANDWIDTH		9 kHz		
ENVIRONMENTAL CONDITIONS		25deg. C, 49%RH				TESTED BY: Dragon				
PHASE OF POWER: NEUTRAL (N)										
No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23100	10.00	25.51	9.37	35.51	19.37	62.41	52.41	-26.90	-33.04
2	0.45906	10.02	25.22	12.41	35.24	22.43	56.71	46.71	-21.47	-24.28
3	0.90825	10.03	23.65	9.20	33.68	19.23	56.00	46.00	-22.32	-26.77
4	3.02775	10.03	27.24	16.42	37.27	26.45	56.00	46.00	-18.73	-19.55
5	16.28250	10.20	28.42	17.33	38.62	27.53	60.00	50.00	-21.38	-22.47
6	21.30225	10.21	28.60	6.60	38.81	16.81	60.00	50.00	-21.19	-33.19

REMARKS: The emission levels of other frequencies were very low against the limit.

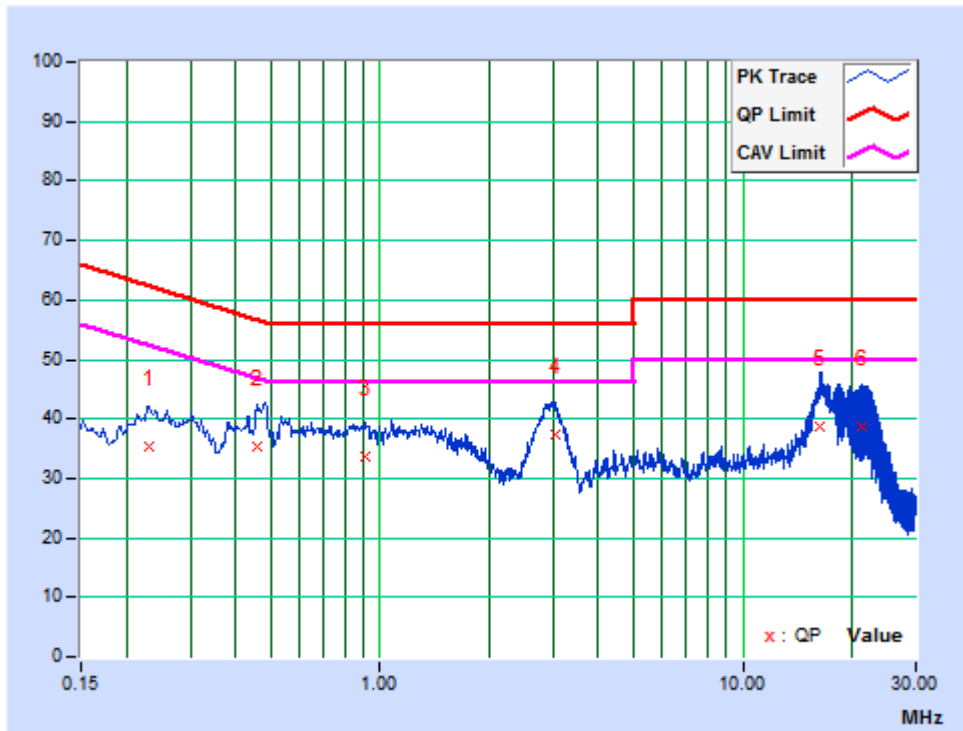



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class B (at 3m)	Class B (at 10m)
	Quasi-Peak (dBuV/m)	Quasi-Peak (dBuV/m)
30 – 230	40	30
230 – 1000	47	37

FREQUENCY RANGE OF RADIATED MEASUREMENT

(For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	Up to 5 times of the highest frequency or 6 GHz, whichever is less

FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (GHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
1 to 3	76	56	70	50
3 to 6	80	60	74	54

- NOTES:** (1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



3.2.2 TEST INSTRUMENTS

FREQUENCY RANGE BELOW 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU26	100005	Oct. 24,18	Oct. 23,19
EMI Test Receiver	Rohde&Schwarz	ESR7	101564	Mar. 12,19	Mar. 11,20
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-555	Nov. 10, 18	Nov. 09, 19
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Dec. 10, 18	Dec. 09, 19
Preamplifier	EMCI	EMC1135	980378	Mar. 19,19	Mar. 18,20
Preamplifier	EMCI	EMC1135	980423	Mar. 19,19	Mar. 18,20
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	Feb. 10,19	Feb. 09,20
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A	N/A

- NOTES:** 1. The test was performed in 10m Chamber.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The VCCI Site Registration No. is R-13012.

FREQUENCY RANGE ABOVE 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	ETS-Lindgren	3117	00085519	Dec. 10, 18	Dec. 09, 19
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Oct. 05,18	Oct. 04,19
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101003	Mar. 12,19	Mar. 11,20
Broadband Preamplifier (1~18GHz)	SCHWARZBECK	BBV9718	266	Oct. 18,18	Oct. 18,19
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 09,18	Nov. 08,19
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A	N/A

- NOTES:** 1. The test was performed in 10m Chamber.
2. The calibration interval of the above test instruments are 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The VCCI Site Registration No. is G-10564.



3.2.3 TEST PROCEDURE

<Frequency Range below 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

NOTES:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
5. Margin value = Emission level – Limit value.



<Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter-to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

NOTES:

1. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
2. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
3. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
5. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
6. Margin value = Emission level – Limit value.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP

<Frequency Range below 1GHz>

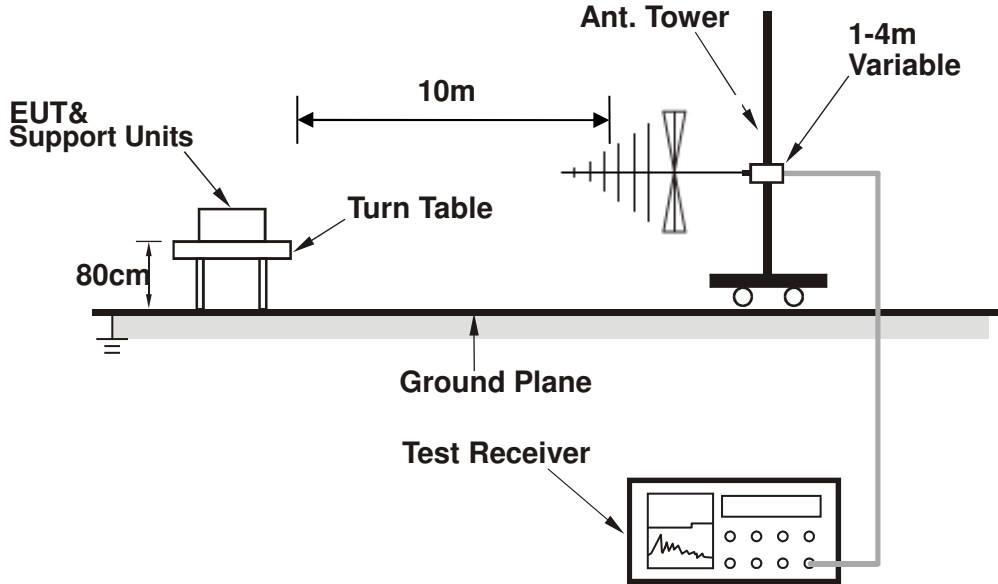

<Frequency Range above 1GHz>

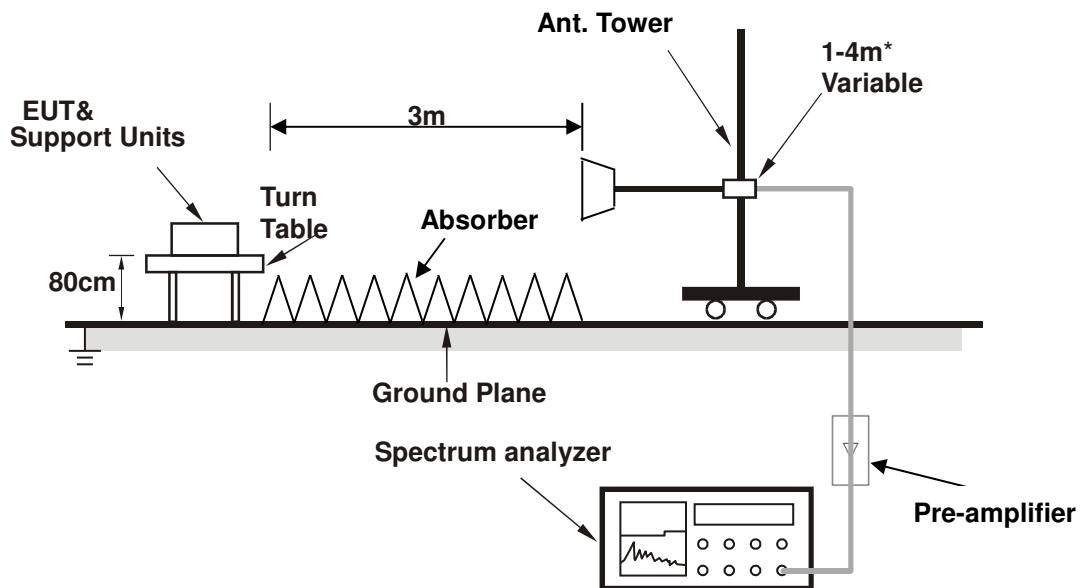

* : depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

3.2.6 EUT OPERATING CONDITIONS


Same as section 3.1.6



3.2.7 TEST RESULTS

TEST MODE		See section 2.2						
FREQUENCY RANGE		30-1000 MHz			DETECTOR FUNCTION & BANDWIDTH		Quasi-Peak, 120kHz	
ENVIRONMENTAL CONDITIONS		23deg. C, 55% RH			TESTED BY: Kamiko			
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M								
No	Frequency MHz	Factor dB/m	Reading dBuV	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	50.855	-17.37	38.21	20.84	30.00	-9.16	400	43
2	159.495	-16.65	33.96	17.31	30.00	-12.69	400	224
3	185.079	-18.47	33.82	15.35	30.00	-14.65	400	150
4	307.056	-14.69	30.92	16.23	37.00	-20.77	400	127
5	364.286	-13.51	31.11	17.60	37.00	-19.40	200	27
6	431.701	-11.94	31.20	19.26	37.00	-17.74	200	223


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30MHz to 1000MHz.
 4. Only emissions significantly above equipment noise floor are reported.

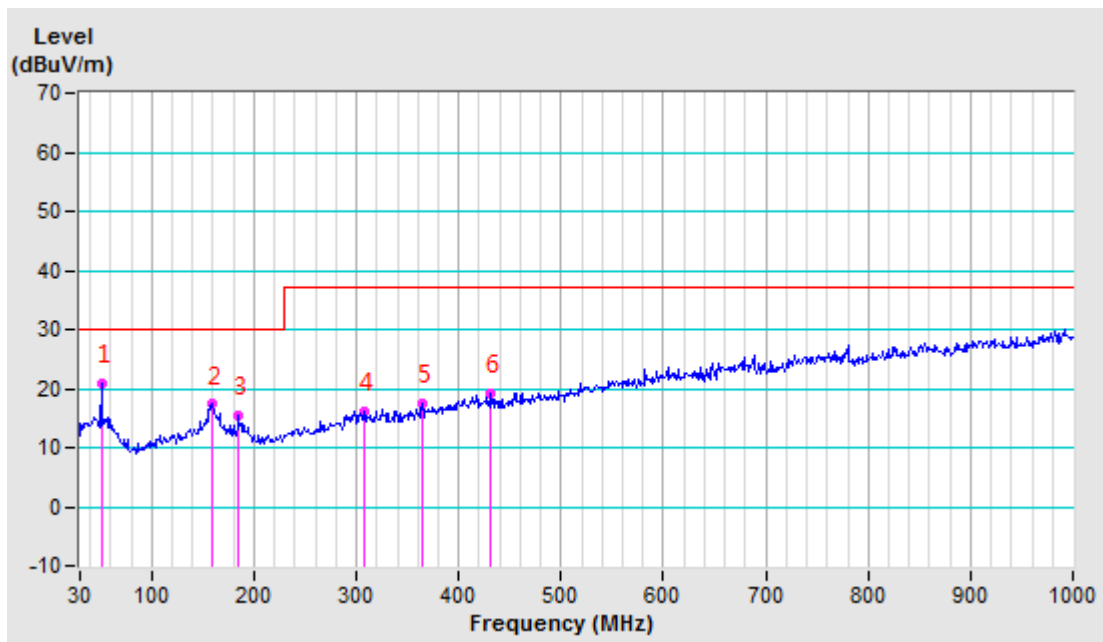



TEST MODE		See section 2.2						
FREQUENCY RANGE		30-1000 MHz		DETECTOR FUNCTION & BANDWIDTH		Quasi-Peak, 120kHz		
ENVIRONMENTAL CONDITIONS		23deg. C, 55% RH		TESTED BY: Kamiko				
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M								
No.	Frequency MHz	Factor dB/m	Reading dBuV	Emission dBuV/m	Limit dBuV/m	Margin dB	.Tower cm	Table deg
1	30.485	-18.19	40.09	21.90	30.00	-8.10	100	273
2	43.969	-17.31	40.35	23.04	30.00	-6.96	100	234
3	95.818	-20.21	36.72	16.51	30.00	-13.49	100	358
4	159.696	-15.44	32.83	17.39	30.00	-12.61	100	41
5	186.808	-18.32	38.09	19.77	30.00	-10.23	100	90
6	321.015	-12.87	30.77	17.90	37.00	-19.10	100	213

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30MHz to 1000MHz.
 4. Only emissions significantly above equipment noise floor are reported.

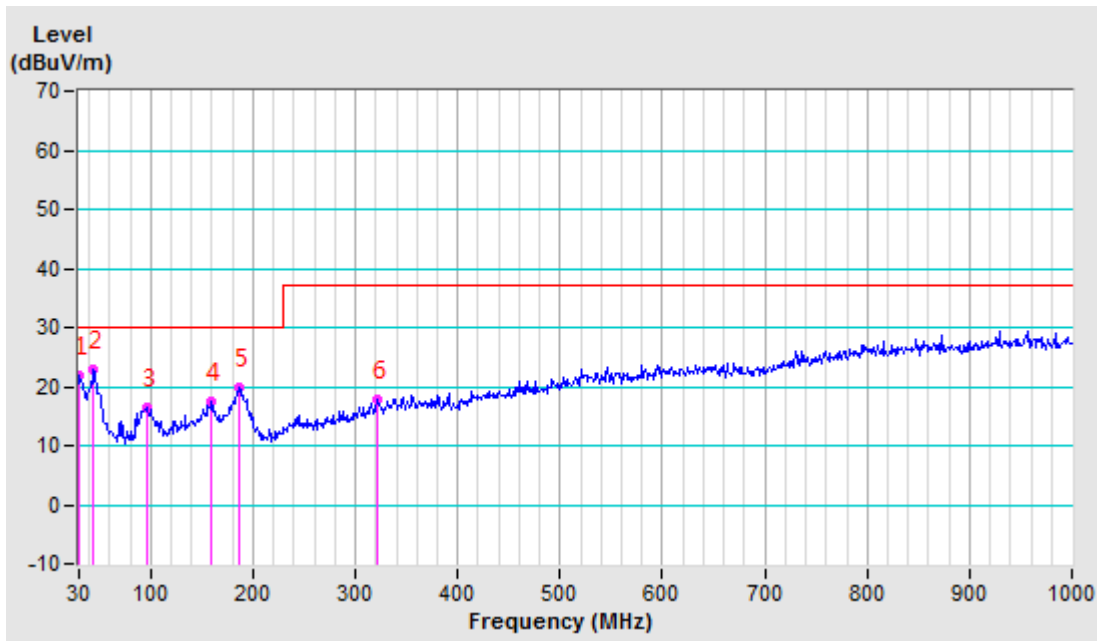



4 PHOTOGRAPHS OF THE EUT

CONDUCTED EMISSION TEST







**BUREAU
VERITAS**

Test Report No.: V190827N053

RADIATED EMISSION TEST (30MHz-1GHz)

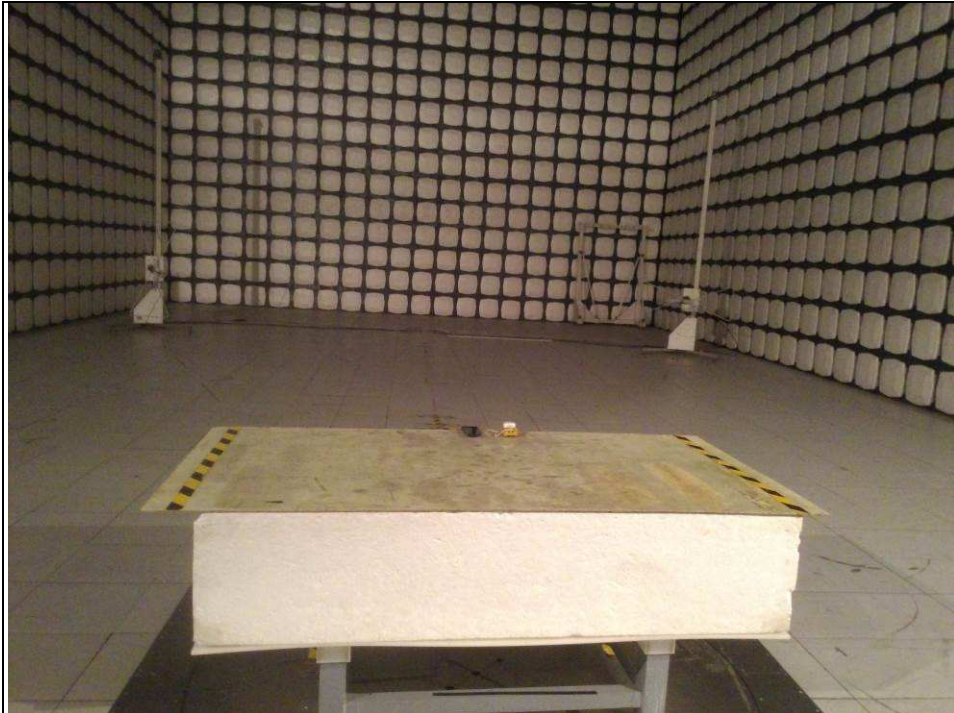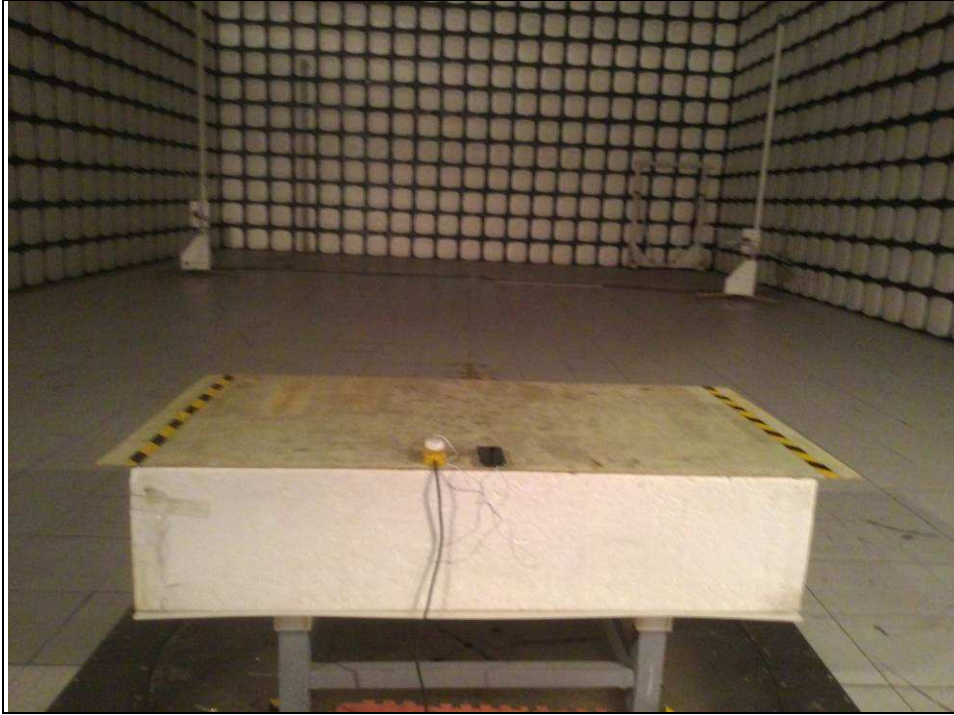



BUREAU Test Report No.: V190827N053
VERITAS

5 APPENDIX A-MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

--- END ---